

6N(99.9999% pure copper) + 4N(99.99% pure copper) hybrid conductor 4 core twisted.



hpct_03_ub32_120
 3.5 stereo plug - 2.5 mono plug(l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:1.2m
 jan:4534165012838



hpct_03_ub33_120
 3.5 stereo plug - 3.5 mono plug(l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:1.2m
 jan:4534165012845



hpct_03_ub3p_120
 3.5 stereo plug - 2pin (l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:1.2m
 jan:4534165012852



hpct_03_ub62_300
 6.3 stereo plug - 2.5 mono plug(l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:3.0m
 jan:4534165012869



hpct_03_ub63_300
 6.3 stereo plug - 3.5 mono plug(l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:3.0m
 jan:4534165012876



hpct_03_ub6p_300
 6.3 stereo plug - 2pin (l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:3.0m
 jan:4534165012883




hpct_03_blx2_300
 4pin xlr plug - 2.5 mono plug(l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:3.0m
 jan:4534165012890



hpct_03_blx3_300
 4pin xlr plug - 3.5 mono plug(l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:3.0m
 jan:4534165012906



hpct_03_blxp_300
 4pin xlr plug - 2pin (l/r)
 6n + 4n hybrid 4 core twisted
 polyester yarn braided jacket
 length:3.0m
 jan:4534165012913

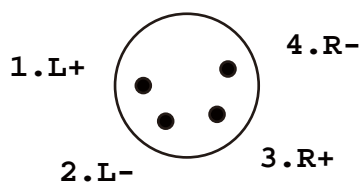

xlr plug pin assignment